

1. DESCRIPTION

MT5727H is a SoC based wireless power receiver which is designed for applications with up to 20W power delivery and can be configured as a wireless charging transmitter to provide power to other receivers. It is fully compliant with WPC Qi Specification (Version 1.2.4).

The AC input can be converted to fully programmable DC output voltage due to the magnetic induction charging technology.

Designed with ARM Cortex M0 processor, integrated with optimized and adaptive full synchronous rectifier control and special LDO, the chip achieves high efficiency, ultra-low bias current and very small power MOSFET $R_{DS(on)}$.

MT5727H is embedded with various protection features, such as FOD, over-voltage, over-current and over-temperature protection which guarantee the system reliability.

2. APPLICATIONS

- Smartphones and wearable devices
- TRx function for phones or power banks
- Other wireless power applications

4. TYPICAL APPLICATION CIRCUIT

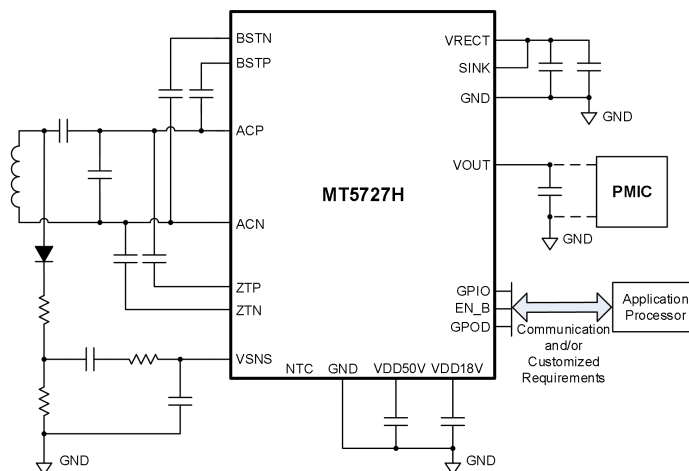


Figure 1 Typical Application Circuit

3. FEATURES

- Power delivery: up to 20W
- Fully programmable output voltage and current limit
- Embedded with ARM Cortex M0 processor with 8KB SRAM and 16KB MTP
- AC input to DC output efficiency: up to 97%
- Reverse charging mode with integrated dual-channel T_x demodulation
- Fully integrated bi-directional current sensing
- Embedded with various protection features: over-voltage, over-current, over-temperature protection, FOD
- Innovative output LDO with output clamping and fast response to line and load transient
- Qi 1.2.4 compliant and proprietary communication protocols support with hardware ASK and FSK modulation and demodulation
- Independent I²C slave interface with additional configurable GPIOs
- Halogen free and RoHS compliant
- 2.82mm x 3.98mm 52-WLCSP